


NELES® TRUNNION MOUNTED, BALL VALVES, FULL BORE, SERIES X

Metso's Neles® series X is a trunnion modular ball valve. Neles X series valves incorporate robust stem to ball connection. This assures valves are delivering solid long lasting performance in high cycle isolation and control applications. Application based seat selection assures valves are capable of delivering long lasting tightness even in most demanding applications including abrasive fluids and solids handling. Valve modularity widens the options in material selections to meet application specific requirements. Valves are also capable of delivering excellent control accuracy together with Metso Q-trim® anti-cavitation and noise reduction trim technology. Valve series meets modern industry requirements concerning safety and emissions.

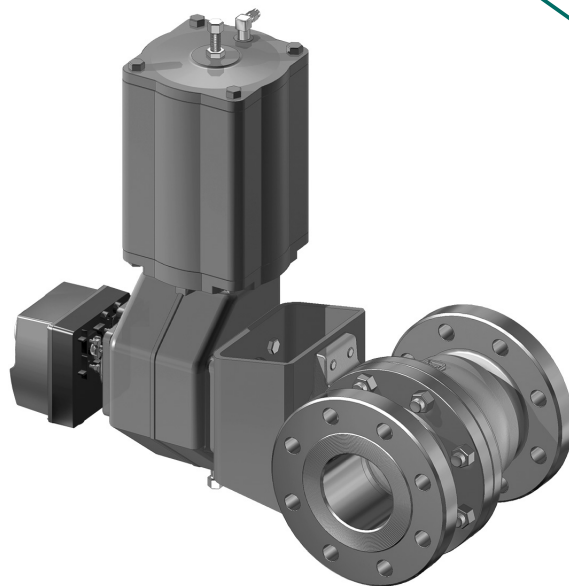

Applications

- Oil and gas production
- Chemical and petrochemical plants
- Power plants
- Liquids, gas and steam
- High temperature service
- Cryogenic service
- Hydrocarbons
- Catalyst handling
- Solids handling
- Polymers
- Control and tight shut-off applications
- High cycling
- Emergency applications ESD/ESV
- LNG
- Natural gas

Sizes/Pressure Classes

- 2"...16" / ASME Class 300.
- 8"...16" / ASME Class 150.
- For ASME Class 600 and larger sizes refer to bulletin 1D21.

Trunnion mounted

- Low operating torque.
- Fully rated seats.
- Smooth control.
- Double block & bleed.
- Quick operations.
- High cycle capability.

Full bore

- Maximum Cv per nominal size.
- Cylindrical flow path allows low flow resistance.
- Full bore design for API requirements.

Increased safety

- V-ring gland packing ensures long maintenance free operation and low emission level.
- Live-loaded construction as standard.
- Fire tested API 607, with selected constructions and seat designs.
- Spiral wound body joint gasket.
- Anti-blowout shaft.

Tightness

- Durable two-way ISO 5208 Rate C or ANSI Class V tightness as standard with spring-loaded metal seats.
- Available with improved tightness rates.
 - API 598 for metal seats above 2".
- ISO 5208 Rate B or ANSI Class VI shut-off as standard with soft seats.


Minimized emissions

- Live-loaded gland packing.
 - ISO 15848
 - Clean Air Act.
- Off-center body joint.
 - Uninterrupted circular spiral wound body gasket.
 - No bending forces to gland packing.

Excellent control characteristics

- Equal percentage inherent characteristic.
- Self flushing, low noise anti-cavitation Q-TRIM® is optional.
- High noise reduction Q2-trim for gas applications.

EXPLODED VIEW

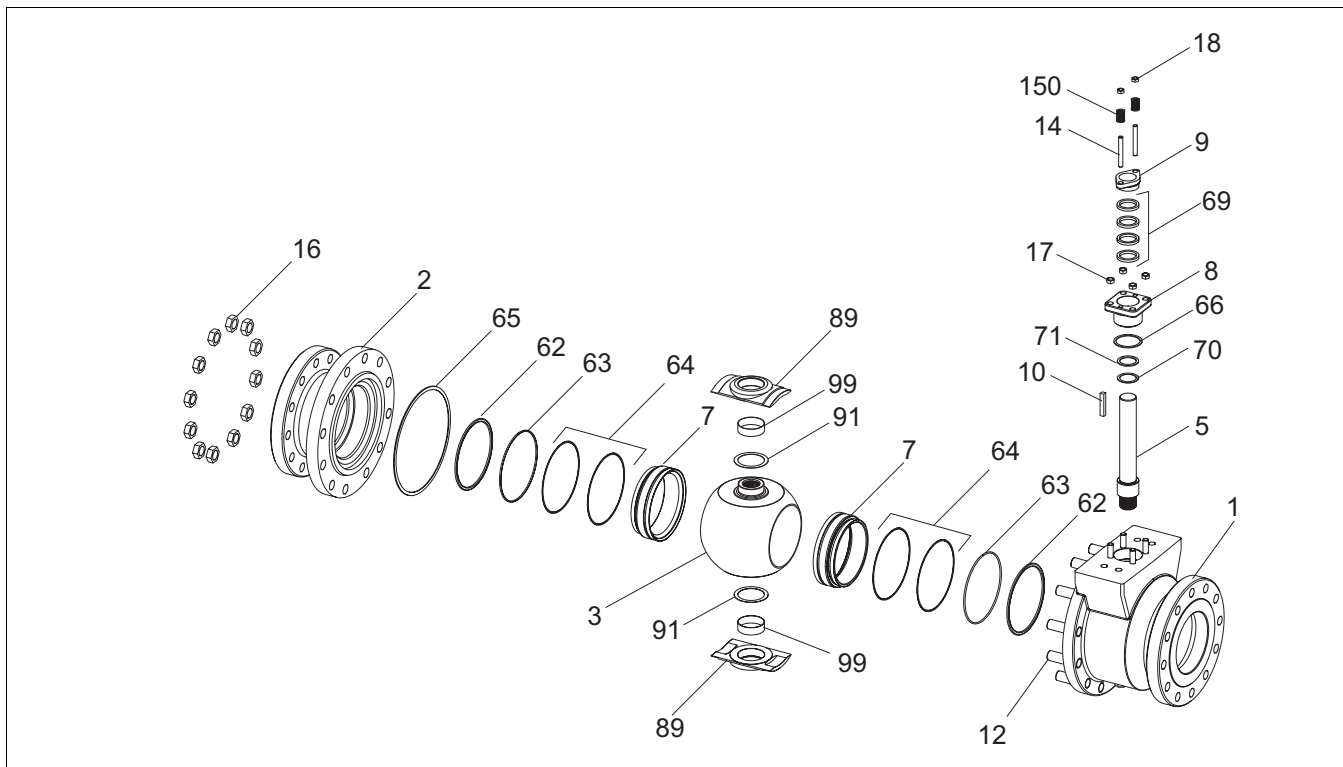

PARTS LIST

Item	Part description	Material		
1	Body	Stainless steel CF8M	Carbon steel WCB	Chrome Moly C5
2	Body cap	Stainless steel CF8M	Carbon steel WCB	Chrome Moly C5
3	Ball	Stainless steel AISI 316 / CF8M		Stainless steel 410
5	Shaft	Stainless steel XM-19		
7	Ball seat	Stainless steel + cobalt based alloy / PTFE or filled PTFE		Stainless steel 410 +CrC
8	Bonnet	Stainless steel CF8M / W. no. 1.4581	Carbon steel WCB / W. no. 1.0619	Chrome Moly C5
9	Gland	Stainless steel CF8M		
10	Key	Stainless steel AISI 329		
12	Stud	ASTM A 193 gr. B8M	ASTM A 320 gr. L7M (B7)	
13	Stud	ASTM A 193 gr. B8M	ASTM A 320 gr. L7M (B7)	
14	Stud	ASTM A 193 gr. B8M	ASTM A 320 gr. L7M (B7)	
16	Hexagon nut	ASTM A 193 gr. 8M	ASTM A 194 gr. 2 HM (2H)	
17	Hexagon nut	ASTM A 193 gr. 8M	ASTM A 194 gr. 2 HM (2H)	
18	Hexagon nut	ASTM A 193 gr. 8M	ASTM A 194 gr. 2 HM (2H)	
62	Seat spring	Alloy 825		
63	Back seal	PTFE or graphite		
64	Back-up ring	PTFE		
65	Body gasket	Stainless steel AISI 316 + PTFE or graphite filled spiral wound		
66	Bonnet gasket	PTFE or graphite		
69	Packing ring	PTFE or graphite		
70	Thrust bearing	PTFE or cobalt based alloy		
71	Thrust bearing	Cobalt based alloy		
89	Trunnion plate	Stainless steel, ASTM A 351 gr. CF8M	Stainless steel, ASTM A 352 gr. CA6NM	
91	Bearing spacer	PTFE + Stainless steel		
99	Trunnion bearing	PTFE + Stainless steel		
150	Disc spring set	Electroless nickel plated spring steel (EN 10083-1.8159)		

TECHNICAL SPECIFICATION

Product type

Full bore trunnion mounted ball valve.
Split body design.
Flanged.

Pressure ratings

ASME Class 150 and 300.

Size range

8"...16" in ASME Class 150.
2"...16" in ASME Class 300.

Temperature range

-50 °C...+400 °C / -60 °F...+750 °F, consult factory for higher temperature applications.

Design standard

Valve body ASME B16.34.
Valve flanges ASME B16.5.
Face-to-face ASME B16.10 long pattern.
Actuator mounting ISO 5211.

Standard materials

Body ASTM A216 gr. WCB.
ASTM A351 gr. CF8M.
Ball ASTM A351 gr. CF8M/AISI 316 + hard chrome plating with metal seats.
Bearings PTFE or cobalt based alloy.
Seats AISI 316+cobalt based alloy.
AISI 316+PTFE insert.
Seals/gaskets PTFE, graphite.
Body gaskets Spiral wound with PTFE or graphite filler.

Gland packing

PTFE (V-ring) or graphite with live loaded construction.

Bolting

B8M/8M with stainless steel body.
L7M/2HM with carbon steel body.
B7 and 2H available in USA only.

Standard options

High temperature linkages.
Degreasing.
High temperature design.
Carbide or NiBo ball coating.
Q-TRIM design.
NACE MR-01-03 as standard, NACE MR-01-75 on request.

Material and test certification

EN90204-3.1 material certificates for body and bonnet.
Tightness test certificate.

Fire tested

API 607, with D and H seats.


Valve testing

Each valve is tested for body integrity and seat tightness. The body test pressure is 1.5 x PN. The seat test pressure is 1.1 x PN. Test medium is inhibited water. Air test upon request.


Valve tightness

ISO 5208 Rate C or Class V for metal seats.
ISO 5208 Rate B or Class VI for soft seats.
Other tightness rates upon request.

MAXIMUM ALLOWABLE Δp IN CONTROL SERVICE

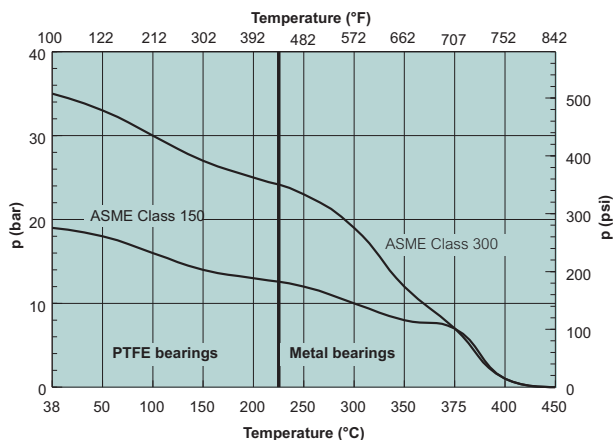

MAXIMUM ALLOWABLE Δp IN ON-OFF SERVICE

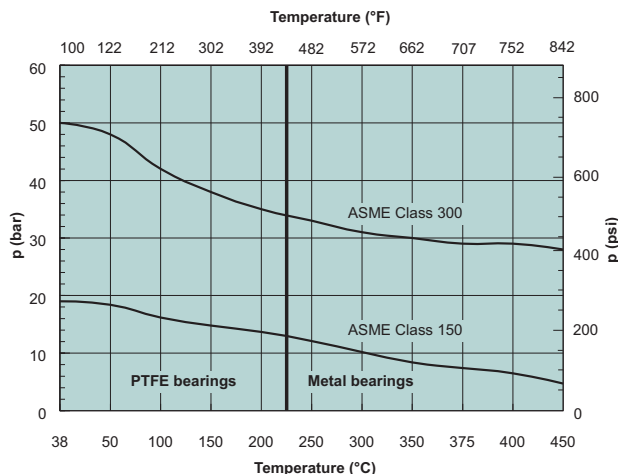


- PTFE/metal bearings
- Chrome plated ball
- PTFE/metal bearings
- Chrome plated ball

Note: When Carbide or Nickel Boron coatings are used according to given technical limitations, max body material P/T values can be used. Always consider shaft strength, consult factory.

STANDARD SEAT CONSTRUCTIONS AND MATERIALS

S


Metal seat

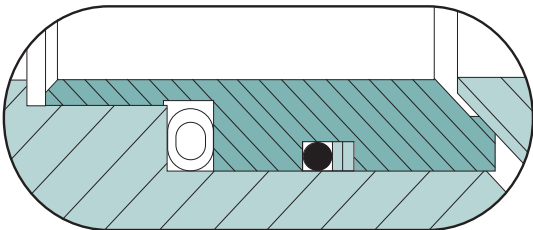

Ball seat: Stainless steel + hard facing.
 Seat seal: Viton® GF O-ring.
 Spring: INCONEL® 625.
 Temp. range: -30 °C... +200 °C / -22 °F...+390 °F.

H


Bellows seat

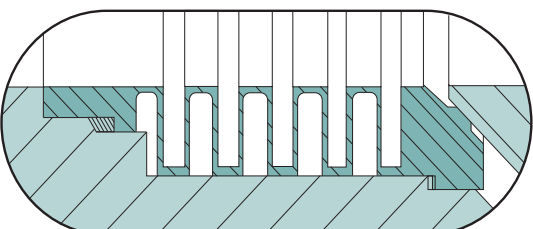

Ball seat: Stainless steel + hard facing.
 Seat seal: Graphite.
 Temp. range: -50 °C... +400 °C / -60 °F...+750 °F.
 Note: For temperature above +400 °C / +750 °F please consult factory.

L


Polymer proof seat

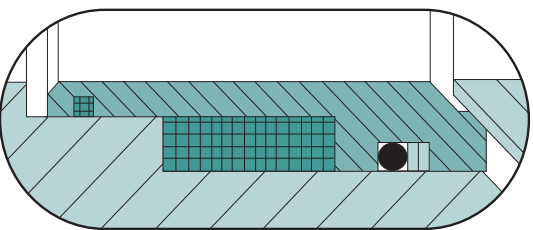

Ball seat: Stainless steel + hard facing.
 Seat seal: Viton GF O-ring / Graphite.
 Temp. range: - 30 °C... +200 °C / -22 °F...+390 °F.
 Note: - Sizes 02" - 8"
 - Size 10" with single seat design only.
 - For larger sizes, use B-seats.

T


Soft seat

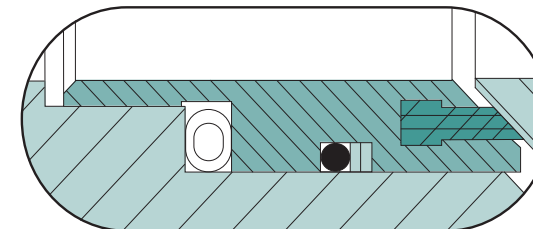

Ball seat: PTFE.
 Seat body: Stainless steel.
 Seat seal: Viton GF O-ring.
 Spring: INCONEL 625.
 Temp. range: -30 °C... +200 °C / -22 °F...+390 °F.

D

Soft seat, fire safe

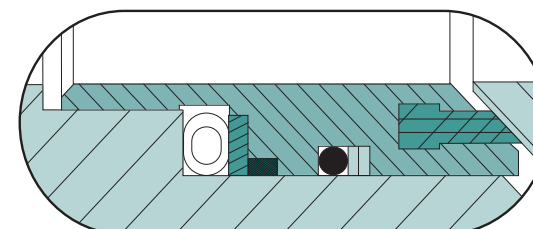

Ball seat: PTFE.
 Seat body: Stainless steel.
 Seat seal: Viton GF O-ring.
 Spring: INCONEL 625.
 Temp. range: -30 °C... +200 °C / -22 °F...+390 °F.

ACTUATOR SELECTION

X-series valve can be equipped with the following Metso actuator types:

B1C/B1J Pneumatic double acting or spring return actuator.
Actuators available for size range DN 50 - 400 / 2"-16"
B1C/B1J actuators have an ISO 5211 mounting face.


M Gear operator for valve sizes DN 50-300 / 2"-12".

When selecting other actuators, please contact your local Metso representative.

For the correct actuator selection in on-off service, you need to know the following process data:

- valve size and seat type
- supply pressure for the actuator
- maximum shut-off pressure across the valve.

DIMENSIONS

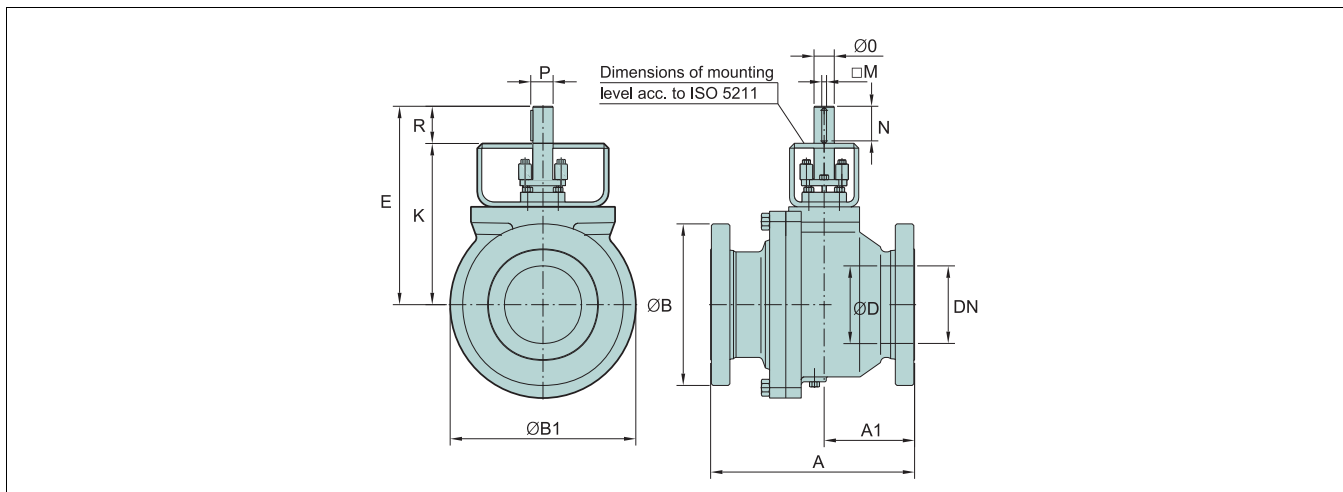

ASME 150

TYPE	DN	ISO FLANGE	DIMENSIONS, mm												kg
			A	A1	ØB	ØB1	ØD	E	K	□M	N	ØØ	P	R	
XM	200	F14, F16, F25	457	229	345	426	203.2	453	385	9.53	68	40	44.23	68	190
	250	F14, F16, F25, F30	533	267	405	514	254.0	562	472	12.70	90	55	60.60	90	325
	300	F14, F16, F25, F30	610	305	485	592	304.8	605	515	12.70	90	55	60.60	90	480
	350	F16, F25, F30, F35	686	343	535	665	340.0	741	607	19.05	134	75	83.15	134	635
	400	F16, F25, F30, F35	762	381	595	750	390.0	779	633	22.23	146	85	94.63	146	840

TYPE	SIZE	ISO FLANGE	DIMENSIONS, inch												lbs
			A	A1	ØB	ØB1	ØD	E	K	□M	N	ØØ	P	R	
XM	8	F14, F16, F25	18.00	9.02	13.50	16.77	8.0	17.83	15.16	0.38	2.68	1.57	1.74	2.68	418
	10	F14, F16, F25, F30	21.00	10.51	16.00	20.24	10.0	22.13	18.58	0.50	3.54	2.17	2.39	3.54	716
	12	F14, F16, F25, F30	24.00	12.01	19.00	23.31	12.0	23.82	20.28	0.50	3.54	2.17	2.39	3.54	1058
	14	F16, F25, F30, F35	27.00	13.50	21.00	26.18	13.4	29.17	23.90	0.75	5.27	2.95	3.27	5.27	1400
	16	F16, F25, F30, F35	30.00	15.00	23.50	29.53	15.4	30.67	24.92	0.88	5.75	3.35	3.73	5.75	1852

Face-to-face dimension acc. to ANSI B16.10, Table 1, long patter


ASME 300

TYPE	DN	ISO FLANGE	DIMENSIONS, mm												kg
			A	A1	ØB	ØB1	ØD	E	K	□M	N	ØØ	P	R	
XG	50	F07, F10	216	89	165	146	50.8	203	168	4.76	35	20	22.16	35	15
	80	F07, F10, F12, F14	282	141	210	200	76.2	225	190	4.76	35	20	22.16	35	32
	100	F10, F12, F14	305	152	255	254	101.6	296	250	6.35	46	25	27.75	46	58
	150	F14, F16	403	201	320	353	152.4	373	305	9.53	68	40	44.23	68	125
	200	F14, F16, F25	502	249	380	462	203.2	453	385	9.53	68	40	44.23	68	225
	250	F14, F16, F25, F30	568	284	445	580	254.0	562	472	12.70	90	55	60.60	90	330
	300	F14, F16, F25, F30	648	324	520	652	304.8	605	515	12.70	90	55	60.60	90	610
	350	F16, F25, F30, F35	762	381	585	700	340.0	741	607	19.05	134	75	83.15	134	800
	400	F16, F25, F30, F35	838	419	650	799	390.0	779	633	22.23	146	85	94.63	146	1015

TYPE	SIZE	ISO FLANGE	DIMENSIONS, inch												lbs
			A	A1	ØB	ØB1	ØD	E	K	□M	N	ØØ	P	R	
XG	2	F07, F10	8.50	3.50	6.50	5.75	2.0	7.99	6.61	0.19	1.38	0.79	0.87	1.38	33
	3	F07, F10, F12, F14	11.12	5.55	8.25	7.87	3.0	8.86	7.48	0.19	1.38	0.79	0.87	1.38	70
	4	F10, F12, F14	12.00	6.00	10.00	10.00	4.0	11.65	9.84	0.25	1.81	0.98	1.09	1.81	128
	6	F14, F16	15.88	7.93	12.50	13.90	6.0	14.69	12.01	0.38	2.68	1.57	1.74	2.68	276
	8	F14, F16, F25	19.75	9.80	15.00	18.19	8.0	17.83	15.16	0.38	2.68	1.57	1.74	2.68	496
	10	F14, F16, F25, F30	22.38	11.18	17.50	22.83	10.0	22.13	18.58	0.50	3.54	2.17	2.39	3.54	727
	12	F14, F16, F25, F30	25.50	12.76	20.50	25.67	12.0	23.82	20.28	0.50	3.54	2.17	2.39	3.54	1345
	14	F16, F25, F30, F35	30.00	15.00	23.00	27.56	13.4	29.17	23.90	0.75	5.27	2.95	3.27	5.27	1764
	16	F16, F25, F30, F35	33.00	16.50	25.50	31.46	15.4	30.67	24.92	0.88	5.75	3.35	3.73	5.75	2237

Face-to-face dimension acc. to ANSI B16.10, Table 2, long patter

VALVE + MANUAL GEAR OPERATOR SERIES M

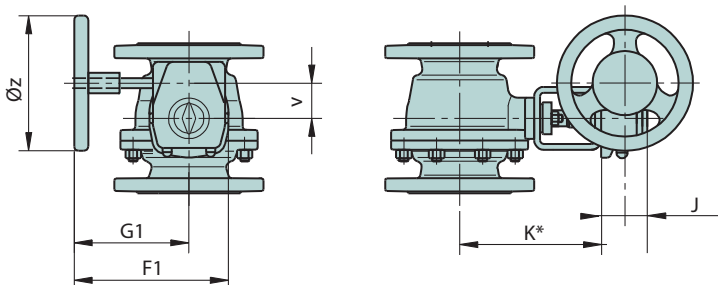


*) See K dimension from tables on page 7.

MANUAL GEAR OPERATOR SERIES M

Actuator size	F1	G1	J	V	Z	kg
M07	235	184	65	52	160	3.8
M10	238	187	65	52	200	4.4
M12	307	238	88	71	315	10.1
M14	385	285	93	86	400	18.2
M15	456	346	102	105	500	26.2
M16	530	387	124	130	600	36.8
M25	597	412	160	182	600	60.8

Actuator size	F1	G1	J	V	Z	lbs
M07	9.25	7.24	2.56	2.05	6.30	8.4
M10	9.37	7.36	2.56	2.05	7.87	9.7
M12	12.09	9.37	3.46	2.80	12.40	22.3
M14	15.16	11.22	3.66	3.39	15.75	40.1
M15	17.95	13.62	4.02	4.13	19.69	57.8
M16	20.87	15.24	4.88	5.12	23.62	81.1
M25	23.50	16.22	6.30	7.17	23.62	134.0

VALVE + B1C/B1J/B1JA

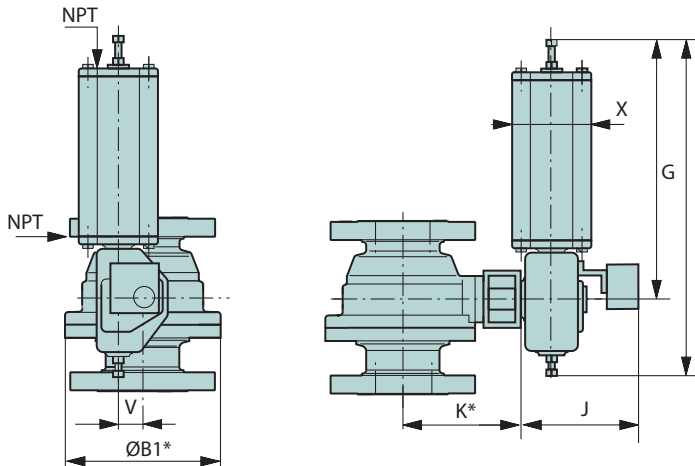

*) See K and ØB1 dimension from tables on page 7.

B1C ACTUATOR

Actuator	DIMENSIONS, mm					NPT	kg
	F	G	J	V	X		
B1C6	400	260	283	36	90	1/4	4.2
B1C9	455	315	279	43	110	1/4	9.6
B1C11	540	375	290	51	135	3/8	16
B1C13	635	445	316	65	175	3/8	31
B1C17	770	545	351	78	215	1/2	54
B1C20	840	575	385	97	215	1/2	73
B1C25	1040	710	448	121	265	1/2	131
B1C32	1330	910	525	153	395	3/4	256
B1C40	1660	1150	595	194	505	3/4	446
B1C50	1970	1350	690	242	610	1	830

Actuator	DIMENSIONS, inch					NPT	lbs
	F	G	J	V	X		
B1C6	15.75	10.24	11.14	1.42	3.54	1/4	9
B1C9	17.91	12.40	10.98	1.69	4.33	1/4	21
B1C11	21.26	14.76	11.42	2.01	5.31	3/8	35
B1C13	25.00	17.52	12.44	2.56	6.89	3/8	68
B1C17	30.31	21.46	13.82	3.07	8.46	1/2	119
B1C20	33.07	22.64	15.16	3.82	8.46	1/2	161
B1C25	40.94	27.95	17.64	4.76	10.43	1/2	289
B1C32	52.36	35.83	20.67	6.02	15.55	3/4	564
B1C40	65.35	45.28	23.43	7.64	19.88	3/4	983
B1C50	77.56	53.15	27.17	9.53	24.02	1	1829

B1J/B1JA ACTUATOR

Actuator	DIMENSIONS, mm					NPT	kg
	F	G	J	V	X		
B1J/B1JA6	485	368	273	36	110	3/8	8
B1J/B1JA8	560	420	279	43	135	3/8	17
B1J/B1JA10	650	490	290	51	175	3/8	30
B1J/B1JA12	800	620	316	65	215	1/2	57
B1J/B1JA16	990	760	351	78	265	1/2	100
B1J/B1JA20	1200	935	358	97	395	3/4	175
B1J/B1JA25	1530	1200	448	121	505	3/4	350
B1J/B1JA32	1830	1410	525	153	540	1	671

Actuator	DIMENSIONS, inch					NPT	lbs
	F	G	J	V	X		
B1J/B1JA6	19.09	14.49	10.75	1.42	4.33	3/8	20
B1J/B1JA8	22.05	16.54	10.98	1.69	5.31	3/8	37
B1J/B1JA10	25.59	19.29	11.42	2.01	6.89	3/8	66
B1J/B1JA12	31.50	24.41	12.44	2.56	8.46	1/2	126
B1J/B1JA16	38.98	29.92	13.82	3.07	10.43	1/2	220
B1J/B1JA20	47.24	36.81	14.09	3.82	15.55	3/4	386
B1J/B1JA25	60.24	47.24	17.64	4.76	19.88	3/4	771
B1J/B1JA32	72.05	55.51	20.67	6.02	21.26	1	1479

HOW TO ORDER

1.	2.	3.	4.	5.	6.	7.	8.	9.	10.	11.
XG	06	D	W	TA	S6	SJ	S	A	A	D

1. sign	VALVE SERIES & STYLE & FACE-TO-FACE
XG	Full bore, trunnions, f-to-f ANSI B 16.10, Table 2, long pattern, ASME 300.
XM	Full bore, trunnions, f-to-f ANSI B 16.10, Table 1, long pattern, ASME 150.

2. sign	SIZE		
ASME VALVES		EN VALVES	
2. sign	NPS	2. sign	DN
02	2"	050	50
03	3"	080	80
04	4"	100	100
06	6"	150	150
08	8"	200	200
10	10"	250	250
12	12"	300	300
14	14"	350	350
16	16"	400	400

3. sign	PRESSURE CLASS
C	ASME Class 150
D	ASME Class 300
J	PN 10
K	PN 16
L	PN 25
M	PN 40

4. sign	END CONNECTION STYLE
W	Raised face, ASME B 16.5, (Ra 3.2 - 6.3/RMS 125 - 250) standard with ASME flanges.
C	EN 1092 -1 Type B1, raised face, standard with EN flanges.

5. sign	CONSTRUCTION & APPLICATION
TA	Standard construction. Live loaded packing.
TE	Single seated. Otherwise standard.
TQ	Q-Trim construction. Otherwise standard
EQ	Single seated, Q-Trim construction.
2G	Q2-trim for gas application, single seated construction, otherwise standard construction

6. sign	BODY MATERIAL
J2	ASTM A216 gr WCB
S6	ASTM A351 gr CF8M
J5	ASTM A217 gr C5

7. sign	BALL / COATING & STEM MATERIAL
SJ	316SS / Hard Chrome & XM-19
SP	316SS & XM-19
RX	316SS / Chrome carbide & XM-19
RR	316SS / WC-CO & XM-19
SL	316SS / NiBo & XM-19

NOTE ! Balls with coating (/) are normally used in metal seated valves.

Metso Flow Control Inc.

Europe, Vanha Porvoontie 229, P.O. Box 304, FI-01301 VANTAA, Finland.
Tel. +358 20 483 150. Fax +358 20 483 151

North America, 44 Bowditch Drive, P.O. Box 8044, Shrewsbury, MA 01545, USA.
Tel. +1 508 852 0200. Fax +1 508 852 8172

South America, Av. Independência, 2500- Iporanga, 18087-101, Sorocaba-São Paulo, Brazil.
Tel. +55 15 2102 9700. Fax +55 15 2102 9748/49

Asia Pacific, Haw Par Centre #06-01, 180 Clemenceau Avenue, Singapore 239922.
Tel. +65 6511 1011. Fax +65 6250 0830

China, 11/F, China Youth Plaza, No.19 North Rd of East 3rd Ring Rd, Chaoyang District, Beijing 100020, China. Tel. +86 10 6566 6600. Fax +86 10 6566 2583.

Middle East, Roundabout 8, Unit AB-07, P.O. Box 17175, Jebel Ali Freezone, Dubai, United Arab Emirates. Tel. +971 4 883 6974. Fax +971 4 883 6836

www.metso.com/valves

8. sign	SEAT TYPES AND BACK SEAL/SPRING MATERIALS			
	Seat type	Back seal type	Spring	Back-up ring
S	S, metal, general service	O-ring	Inconel 625	PTFE
L	L, metal, Polymer proof	Graphite / O-ring	----	PTFE
H	H, metal, bellows	Graphite	----	----
T	T, soft, general service	O-ring	Inconel 625	PTFE
D	D, soft fire safe service	Graphite / O-ring	Inconel 625	PTFE

9. sign	SEAT AND COATING MATERIAL	
	Seat material	Coating
A	Type 316 stainless steel with S and L type seats AVESTA 248SV with H type seat.	Cobalt based hard facing
R	Type 316 stainless steel with S and L type seats AVESTA 248SV with H type seat.	Tungsten Carbide, WC-CO
B	Type 316 stainless steel with S and L type seats AVESTA 248SV with H type seat.	Chrome Carbide, CrC-LF
F	F6NM with H-type seat for NACE service.	Chrome Carbide, CrC-LF
Seat material		Insert
T	Type 316 stainless steel.	PTFE
M	Type 316 stainless steel.	Filled PTFE
N	Type 316 stainless steel.	Polyamid

10. sign	BEARING AND SEAL MATERIALS				
	Trunnion bearing	Packings	Body gaskets	O-rings	Thrust bearing
A	PTFE / SS net	V-rings PTFE	PTFE	Viton GF	Cobalt based alloy
B	PTFE / SS net	Graphite	Graphite	Viton GF	Cobalt based alloy
C	Cobalt based alloy	V-rings PTFE	PTFE	Viton GF	Cobalt based alloy
D	Cobalt based alloy	Graphite	Graphite	Viton GF	Cobalt based alloy
H	PTFE / SS net	V-rings PTFE	PTFE	EPDM	Cobalt based alloy
S	PTFE / SS net	Graphite	Graphite	EPDM	Cobalt based alloy

11. sign	BOLTING MATERIAL	
	Bolting material with ASME valves	
	Studs	Nuts
D*	B8M	8M
F**	L7M	2HM
A***	B7	2H

* Bolting materials for stainless steel body.

** Bolting materials for carbon and low alloy steel body.

*** Bolting materials for carbon and low alloy steel body in USA only.

Subject to change without prior notice.

